


DATE :	Jan/25/21'
CMS P/N :	B8801115
Dwg No:	CAD-009814
CUST. P/N :	
CUSTOMER :	
DESCRIPTION	USB3C-A/1-CRS/UA-2.5M(Blue,OD5.5)
APPROVE:	

REV.	DATE	DESCRIPTION	BY
A	Jan/25/21'	DR-00529	Lucky

■ CONFIGURATION

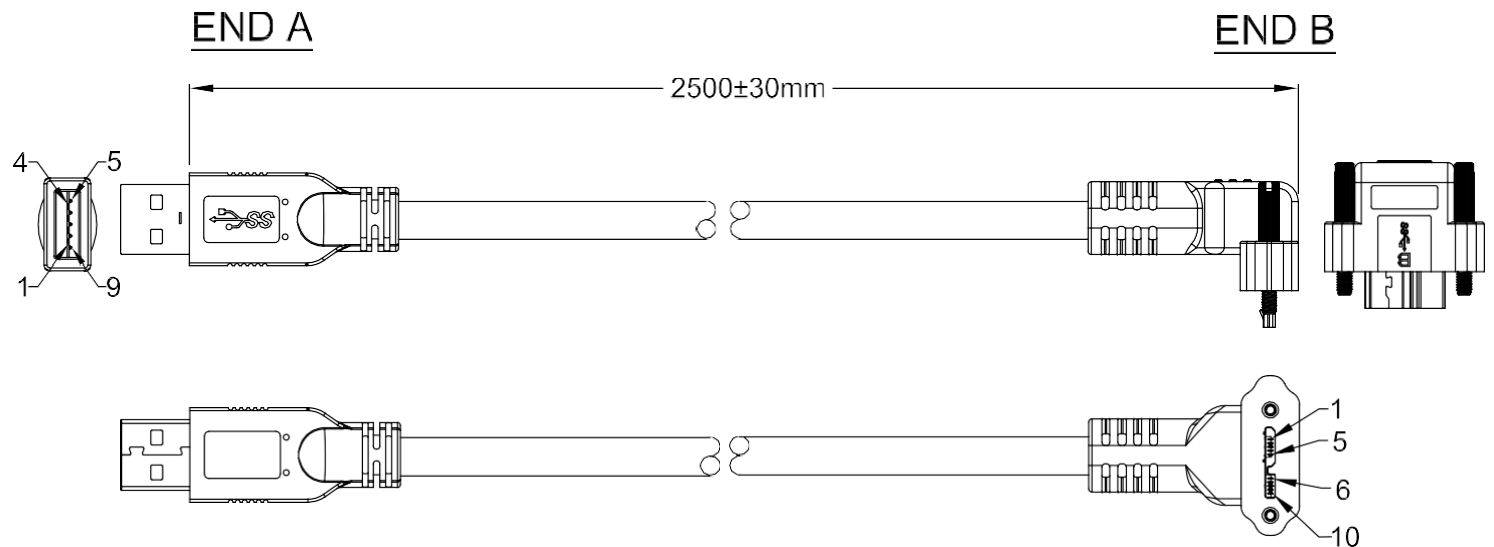

■ SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold 30u"	MOLD No.	CMS-USB40	SHIELD'G	-
CONNECTOR TYPE	USB-9MASS30NBU	T. SCREW	-		


2. END B

CONT. PLATING	Gold 15u"	MOLD No.	CMS-USB61	SHIELD'G	Copper foil
CONNECTOR TYPE	USB-10MDSS15NB	T. SCREW	Jack Screw M2 Size :3.0x20.00x5.5		

3. WIRES

WIRE GAUGE	28Awg&28Awg&24Awg	LENGTH	2530+20-0mm	SHIELD'G	AB
CONDUCTORS	(1TP+MAB)x2+(1TP+AL)+2C	COLOR	Blue (301U)	UL/CSA	UL2725
JACKET MAT'L	PVC	INS. MAT'L	SR-PVC&FM-SKIN PE&FM-PE	WIRE O.D.	5.5mm

4. CONNECTOR PIN OUT

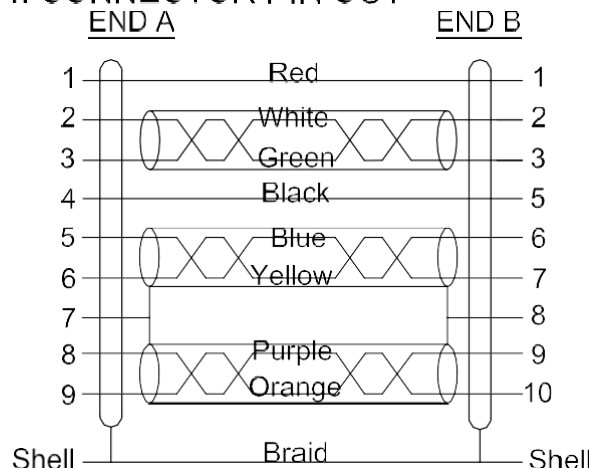

5. SPECIAL REQUIREMENTS

- 5.1 Product requirement for Green environment protection:RoHS.
- 5.2 Overmold PVC is 45P Blue(Pantone:301U)(RoHS).